



ENGINE DECARBONIZATION

PETROL / DIESEL / LPG

RESTORE THE PERFORMANCE OF YOUR PETROL / DIESEL / LPG ENGINE

BENEFITS

RETURN TO THE INITIAL PERFORMANCE

CARBON DEPOSITS REMOVAL FROM:

FUEL SAVE

VALVES

TURBO

SPARK PLUGS

INJECTORS

INCREASE ENGINE'S POWER

EGR VALVES

FAP OBSTRUCTIONS



VALVES · SPARK PLUGS · EGR · DPF · FAP OBSTRUCTIONS · INJECTORS

TECHNICAL DATA	Cod. 02.013.13	Cod. 02.013.12	Cod. 02.013.15
Model	OXY MATE	OXY MASTER	OXY MASTER Plus
Intake manifold decarbonisation	—	optional	standard
Power supply	230V 50 Hz	230V 50 Hz	230V 50 Hz
Max HHO Production	90 lt/h <10A 20°	384 lt/h a 20A	384 lt/h a 20A
Tank capacity	4 lt	60 lt	60 lt
Touch Screen Interface	3"	10"	10"
WiFi / Bluetooth standard	✓	✓	✓
Electrolytic cell inox steel Aisi 316	✓	✓	✓
Timer	0-90'	0-180'	0-180'
Manual Cycle with	✓ fixed flow	✓ adjust flow	✓ adjust flow
Automatic Cycle	✓	✓	✓
Concentration rate electrolyte in not distilled water	3%	10%	10%

Safety device

Red button	✓	✓	✓
Level sensor inside the tank	✓	✓	✓
Automatic switchoff for >20 A	✓	✓	✓
Vibration tachometer	✓	—	—
Tachometer with obd and bluetooth socket	—	✓	✓
Non-return valve on the delivery tube	✓	bubbler	bubbler
Accelerator locking pressor for Oxy Mate / Oxy Master models	optional	optional	optional
Dimensions, cm	38 x 27,5 x 65,5	60 x 60 x 105	60 x 70 x 105
Weight (kg)	29 kg	120 kg	125 kg

HHO OXY MATE



MADE IN ITALY

OXY MATE
Cod. 02.013.13

- Power supply 230V 50Hz (not from vehicle battery)
- High energy efficiency thanks to the modular system (patented) - picture A
- Body in stainless steel (AISI 316L)
- Intuitive 3" touch screen interface
- Vibration sensor for rpm reading (car running)
- Continuous control of the electrolyte density and signaling of the need to fill up the level of the water
- Suitable for Petrol / Diesel / LPG engines up to **3000cc**
- **Application for data transfer / Android**
- 1kg KOH included



HHO OXY MASTER



MADE IN ITALY

OXY MASTER
Cod. 02.013.12

- Power supply 230V 50 Hz (not from vehicle battery)
- High energy efficiency
- Tank-electrolytic cell group in modular aisi 316 L stainless steel
- 10 "Touch interface with intuitive software
- Bluetooth rpm sensor (car running)
- WiFi-Bluetooth connection as standard
- Continuous control of the electrolyte density and signaling of the need to fill up the level of the water
- External bubbler filter (to avoid return of the flame)
- Suitable fo Petrol / Diesel / LPG engines up to **8000cc**
- **Application for data transfer / Android**
- 6 kg KOH included

HHO OXY MASTER PLUS

2 IN 1 ENGINE DECARBONIZER (decarbonizer 02.013.12 + intake manifold cleaning kit)

OXY MASTER PLUS
Cod. 02.013.15

STANDARD ACCESSORIES

- **A:** Mounting discs
- **B:** Nebulizer
- **C:** 2.5 m hose
- **D:** Decarbonization liquid, 1 lt



MADE IN ITALY



SPIN[®]

AICS
AIR INTAKE CLEANING SYSTEM



PORTABLE AIR INTAKE CLEANING SYSTEM

Cod. 02.013.17

FUNCTION:

- Removal of carbon residues from the walls and suction ducts, without disassembling the parts, speeding up maintenance procedures
- The system nebulises the AICS LIQUID chemical product which acts in contact with the carbon residues, dissolving and removing them in a progressive and controlled way. For the same principle the cleaning cycle continues also in the following Km after the treatment


BENEFITS:

- Return to initial engine performance
- Fuel saving
- Increased engine power

TECHNICAL DATA:

- 5" touch screen display
- End of treatment reports and / or buzzer alerts
- 2.4 GHz WiFi connection
- Input voltage: 10-16V DC
- Power: 15W
- Tank: 2 lt
- Compact and lightweight (30x28x18cm / 3.7Kg)

STANDARD ACCESSORIES

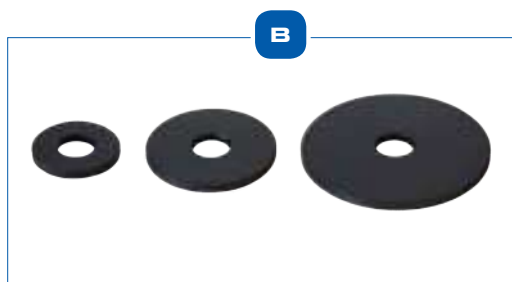

- **A:** Power cables with clamps (L = 2.5m)
- **B:** Mounting discs
- **C:** Nebulizer
- **D:** 2.5m hose
- **E:** AICS liquid, 1 lt

OPTIONAL ACCESSORIES

Cod. 02.013.16

> Accelerator locking presser for Oxy Mate / Oxy Master models



Cod. 02.013.19

> Potassium hydroxide KOH, 1 kg



Cod. 02.013.18

> Liquid for decarbonisation of intake manifolds, 1lt

